

## 40 Watt Metal Column Loudspeaker


- Thermal Fuse
- Ceramic Terminal Block
- Optional DC Blocking Capacitor
- External Variable Tapping Selection
- Suitable for Voice Alarm Applications
- Complies with BS5839 Part 8




The MCS range of metal column loudspeakers offers a combination of elegant styling, robust construction and high performance. The enclosure is tuned to give a wide frequency range not normally associated with column loudspeakers and as such, produces high quality music and speech reproduction. Ideally suited for use in airports, churches, factories, sports and conference centres.

Available in 40 watt version, these units offer external variable tapping selection and 20mm cable gland entry. In compliance to BS5839 part 8 all models incorporate a ceramic terminal and thermal fuse and are, therefore, suitable for use in voice alarm applications.

### Dimensions (mm)

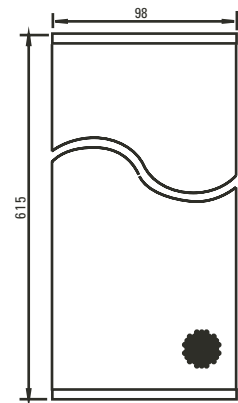


Front View



Top and Bottom View

# Technical Specification


## Polar Pattern

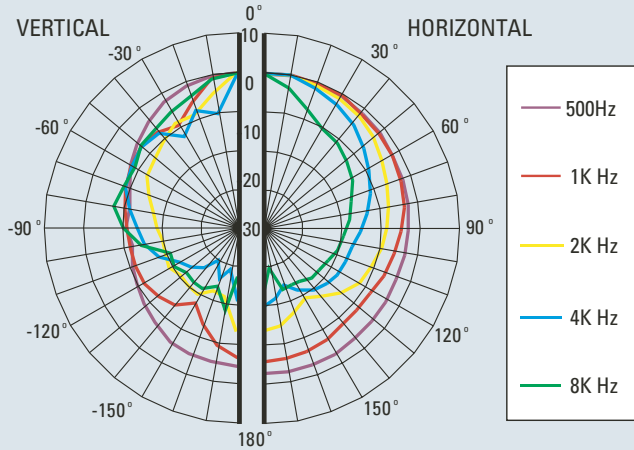

## Technical Specification:

Power Handling	40 watts
Rated Input	100 volt
Transformer Tappings	40, 20, 10, 5 watts
SPL (1w/1m)	92dB
Max SPL (rated/1m)	108dB
Frequency Response	170Hz – 18kHz
Dimensions (H x W x D)	615mm x 98mm x 90mm
Material	Steel Front, Aluminium Rear
Weight (inc. packaging)	3.8 kg
Colour	White RAL9016
Stock Code	200-127-12

## Frequency Response

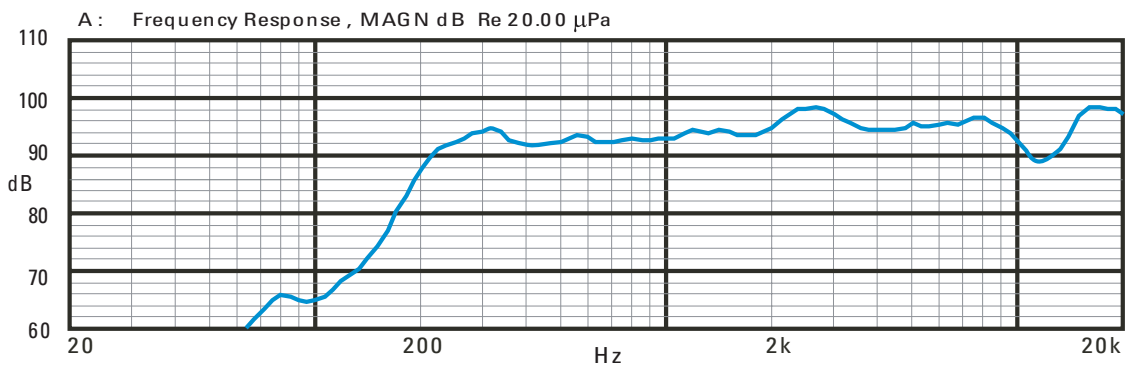

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice  
**Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT**