

Cirrus Pro X4

KEY FEATURES

- Unique Cloud Chamber Detection Principle
- Site Configurable as 1, 2, 3 or 4 Zone
- Multi-function Display and Programmer
- Programmable 'Pre-Alarm' warning conditions (per pipe)
- 3 Programmable 'Fire' warning conditions (per pipe)
- Local Buzzer
- Silence and Reset Buttons
- Vast Sensitivity Range (incipient to conflagrating)
- Fixed or Variable sensitivity options
- 3 Programmable time zones per day
- Latching / non latching alarm contacts
- Airflow Monitoring
- 'Fault Diagnostic' feature
- 'Detector' text and 'Sampling Pipe' location text
- 'Alarm' action text
- Immune to dust, humidity & temperature changes



CLOUD CHAMBER FIRE DETECTOR

The 'sensitivity range' is the key feature that makes the Cirrus Pro Series Fire Detector the worlds most versatile fire detection device.


For over 20 years Cloud Chamber detectors have been known as the most sensitive fire detection device, able to detect at the true incipient stage of a developing fire.

The New Cirrus Pro Series Detectors have a vast sensitivity range capable of being even more sensitive than previous versions. In addition the detector may now be configured to be installed in heavily contaminated environments, such as polluted production and warehousing facilities.

ALMOST UNLIMITED APPLICATIONS

- **High Sensitivity Applications include:-** Computer Rooms, Clean Rooms, Control Rooms, Data Centres, Valve Halls, Archive Storage, Anechoic Chambers, EDP areas.
- **General Sensitivity Applications include:-** Historic Buildings, Museums, Hospitals, Cathedrals, Theatres, Art Galleries, Clean Warehouses, Atria, Indoor Stadiums.
- **Harsh Environment Applications include:-** Cold Storage Facilities, Specialist Production Facilities, Food Industry Facilities, Paper Production Facilities, Transportation Terminals, Flight Simulators, Aircraft Hangers, Prisons, Inaccessible Voids, Dirty Warehouses.



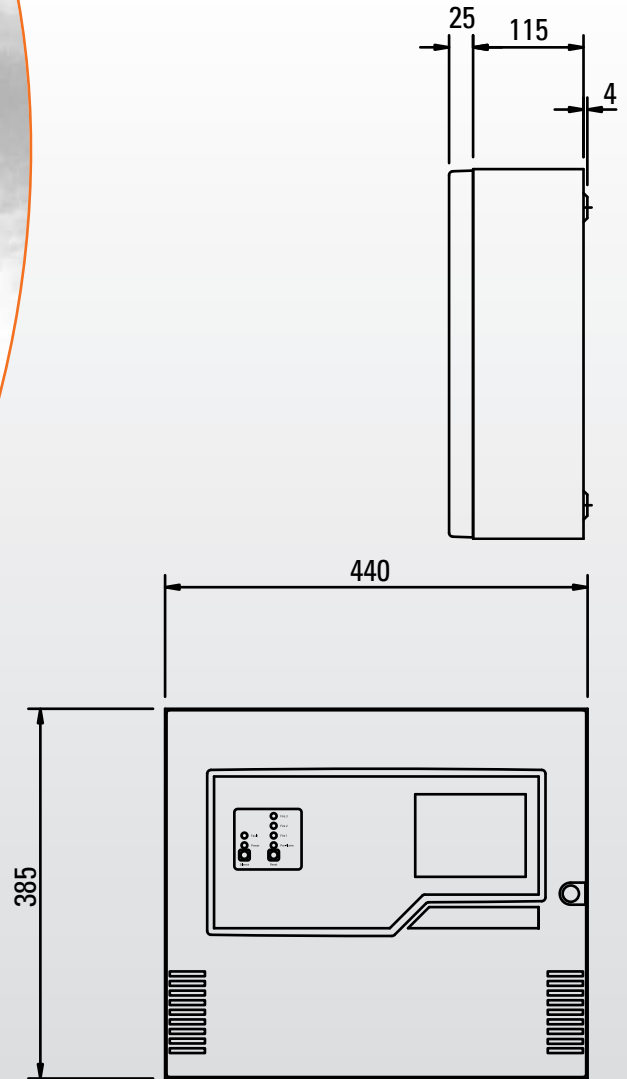

DETECTOR SPECIFICATION

Supply Voltage:

20 - 29VDC

Power Consumption:

22 watts in alarm

Current Consumption:

800mA quiescent 930mA in alarm

Dimensions:

Width: 440mm, Height: 385mm, Depth: 144mm

Weight:

9kg (19.8lbs)

Operating Conditions:

Detector Ambient: 0°C to 38°C (32°F to 100°F)

Tested to: 0°C to 55°C (32°F to 131°F)

Sampled Air: -20°C to 60°C (-4°F to 140°F)

Humidity: 10 - 95%RH, non-condensing

IP Rating: IP30

Cable Access:

20 x 20mm knockout, 4 x 22.5mm knockouts

Cable Termination:

Screw terminal blocks
(0.2 - 2.5mm², 30 - 12AWG)

Multi-function Display/Programmer:

Cirrus Pro X4 incorporates a quarter VGA backlit LCD. In normal conditions the Date, Time, Detector Text and Particle Levels are all displayed. Alternatively any Fault, Pre-alarm or Fire conditions will be displayed. Event Logs, 'Historical' and 'Real Time' graphs may also be displayed.

The LCD display is also used in conjunction with the programming keys to commission each unit without need for a computer link.

Sampling Network:

	1 Pipe	2 Pipe	3 Pipe	4 Pipe
Sampling Heads	10	20	30	40

Alarm Indications:

Pipe 1: Pre-alarm, Fire 1, Fire 2, Fire 3.

Pipe 2: Pre-alarm, Fire 1, Fire 2, Fire 3.

Pipe 3: Pre-alarm, Fire 1, Fire 2, Fire 3.

Pipe 4: Pre-alarm, Fire 1, Fire 2, Fire 3.

Other Indications:

Supply Healthy, General Fault.

Sensitivity Range:

20,000 particles per cc to 3 million particles per cc 10 programmable sensitivity ranges.

Programmable Inputs:

4 monitored inputs for Isolate, Silence, reset and 'Sensitivity Change' feature.

Programmable Output Relays:

17 Relays rated 1A @ 30VDC
(Volt-free change over contacts)

Event Log:

128 events stored on FIFO basis

Data Retention:

Approx 10 day historical graph.

Variable Sensitivity Settings:

7 day programmable settings with 3 time zones per day.

Airflow Monitoring:

'High Airflow' and 'Low Airflow' fault monitoring.