

5" Ceiling Loudspeaker


- Mild steel fire dome
- 150°C thermal fuse
- Ceramic terminal block
- Fire resistant internal cabling
- Optional DC blocking capacitor
- Fully compliant with BS5839 part 8



5.25", flush mount ceiling speaker with innovative fitting system for fast and simple installation.


This patented fire dome has been designed for ease of installation offering 1st and 2nd fit. The unique removable top plate on the dome comes complete with ceramic termination that enables the installer to make all cable connections on a flat plate rather than inside the frugal space offered on a standard fire dome. Once the cabling has been completed the supply line can be checked for continuity/earth faults without damaging the loudspeaker. The ceiling loudspeaker can be connected in the knowledge that the cables are sound.

Dimensions (mm)

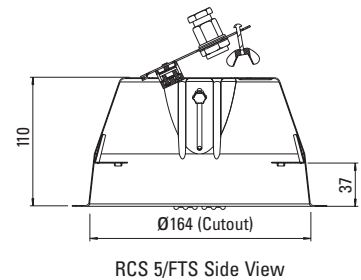

Technical Specification


Polar Pattern

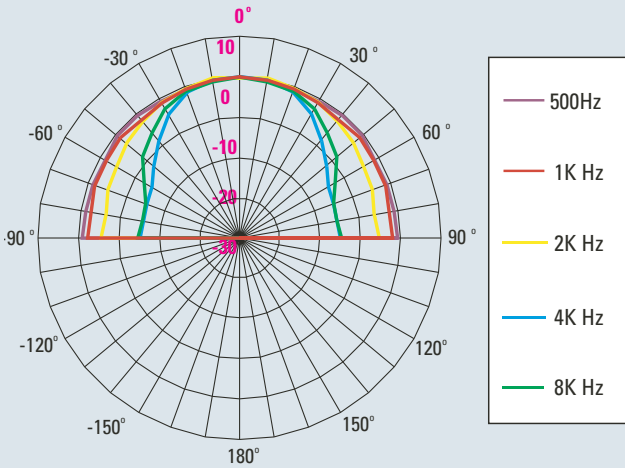

Technical Specification:

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75, 0.25 watts
SPL (1w/1m)	92dB
Max SPL (rated/1m)	95dB
Frequency Response	100Hz – 17.5kHz
Dimensions (diameter x depth)	198mm x 110mm
Cutout Size (diameter)	160mm
Material	Steel
Weight (inc. packaging)	1.0 kg
Colour	White RAL9016
Stock Code	200-062-18-(c)

Frequency Response

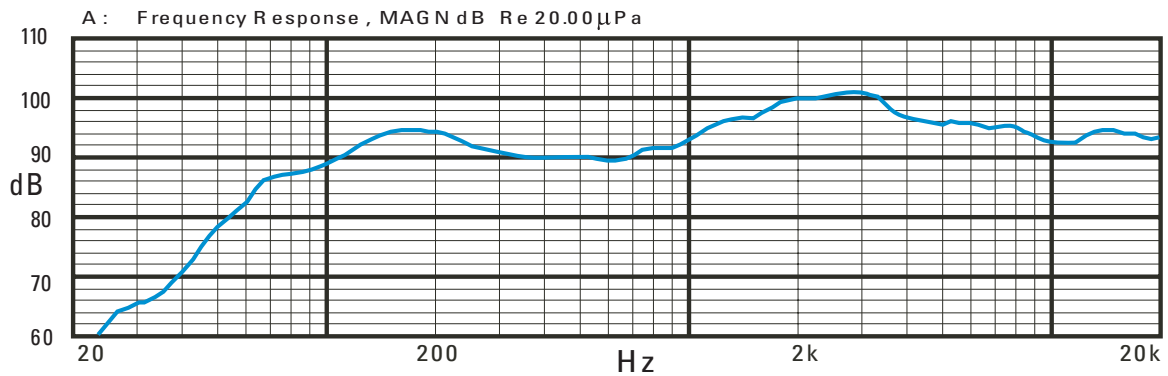

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT