


- Mild Steel Fire Dome
- 150°C Thermal Fuse
- Ceramic Terminal Block
- Fire Resistant Internal Cabling
- Optional DC Blocking Capacitor
- Complies with BS5839 Part 8

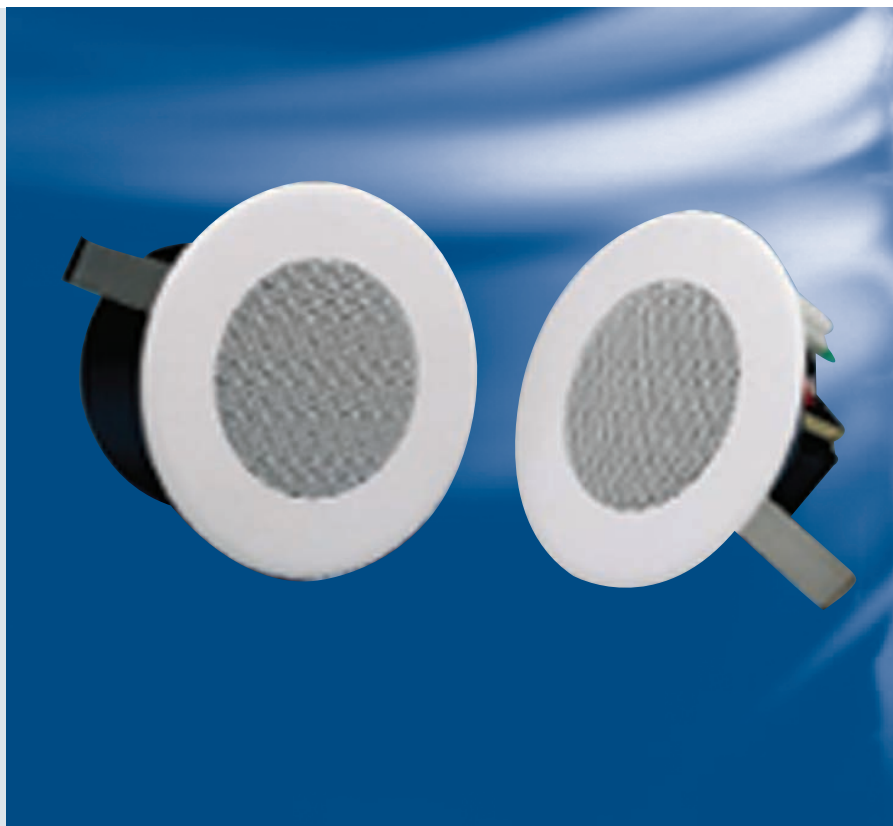

The RCS 4/T, miniature ceiling loudspeaker is an addition to our highly successful RCS range. Employing a 4" high quality, plastiflex treated dual cone, it is ideally suited for areas where space is a premium. Supplied with a 4 watt line transformer, this unit is suitable for general public address requirements.

The plastiflex treated cone means this loudspeaker can also be used in humid atmospheres such as bathrooms and clean room areas.

In compliance with BS5839 part 8, the RCS 4/FTS incorporates a steel firedome, ceramic terminal, thermal fuse and is, therefore, suitable for voice alarm applications.

Ease of installation is a key feature of these units, incorporating a user friendly concealed spring mounting arrangement that enables quick and easy access to the speaker once it has been installed.


4", flush mount ceiling speaker with innovative fitting system for fast and simple installation.

Fully compliant with BS5839 part 8, this speaker is supplied complete with:

- Mild steel fire dome
- 150°C thermal fuse
- Ceramic terminal block
- Fire resistant internal cabling
- Optional DC blocking capacitor

# Technical Specification


## Polar Pattern

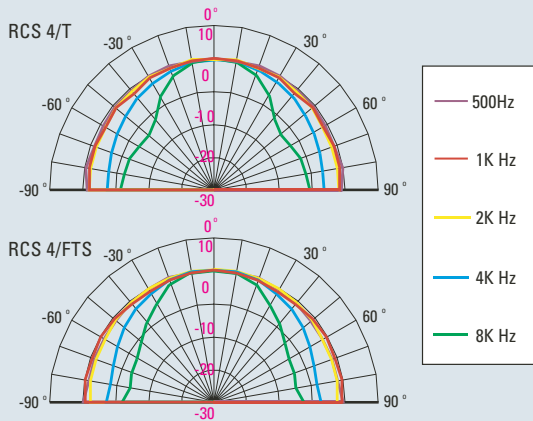

## Technical Specification:

Power Handling	4 Watts
Rated Input	
Transformer Tappings	4, 2, 1, 0.5, 0.25 watts
SPL (1w/1m)	83dB
Max SPL (rated/1m)	89dB
Frequency Response	220 - 16.5 kHz
Dimensions	98h x 132dia mm
Stock Code	200-065-22

## Frequency Response

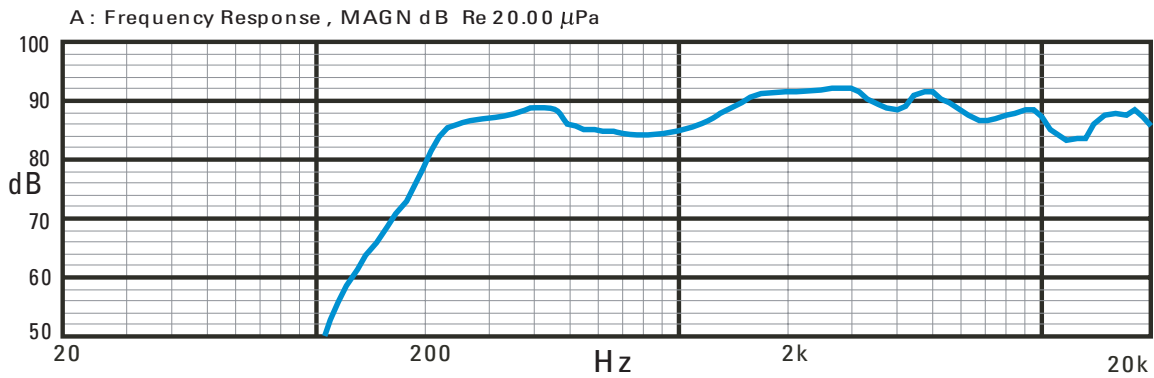

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

**Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT**