

- Easy to Install
- Full Weatherproof Protection
- Suitable in High Moisture Areas
- Available in 100V, 70.7V and 8 ohm
- Stainless Steel Mounting Springs



This ceiling loudspeaker has been developed to offer a flush mount ceiling option where a degree of ingress protection against moisture is required.


This loudspeaker has ingress protection to IP55 and is capable of withstanding low pressure jets of water from hose pipes. This makes the unit ideal for applications such as food processing plants where regular hosing of the entire room is required.

The unit is constructed from rugged UL94V0 ABS and utilises a sealed rear enclosure with glanded cable tail to retain its IP integrity.

The system employs a 4" full range polypropylene driver for exceptional response characteristics. The non shedding properties of the driver unit and IP rating also makes the system ideal for use in 'clean-room' environments.


The system can be ordered in 100 & 70.7 volt or 8ohm configuration and have a simple push fit system for ease of install. Units are finished in brilliant white (RAL9016).

Dimensions (mm)

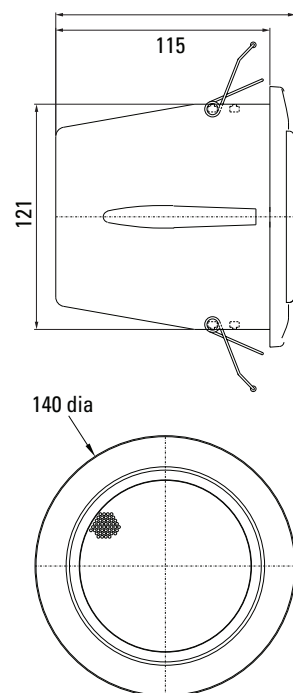

Technical Specification


Polar Pattern

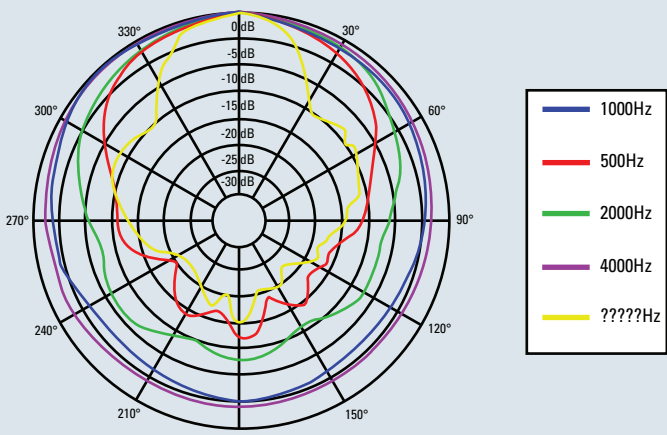

Technical Specification:

Rated Power	6 Watt
Impedance	833Ω, 166Ω, 3333Ω, 6667Ω, and 8Ω
Power Taps @ 100V	6W, 3W, 1.5W & 8
Power Taps @ 70.7V	6W, 3W, 1.5W, 0.75W & 8
SPL (1W/1m)	88dB
Max SPL (Rated W/1m)	95dB
Frequency Range (-10dB)	150Hz - 20K Hz
Dispersion 1KHz/4KHz	210° / 130°
Ambient Temperature	-30°C - 60°C
Water Protection	IEC529 IP55
Power Selection Way	7 core cable
Colour / Finish	White (RAL9016)
Dimensions	140 dia x 165h (mm)
Stock Code	200-066-23

Frequency Response

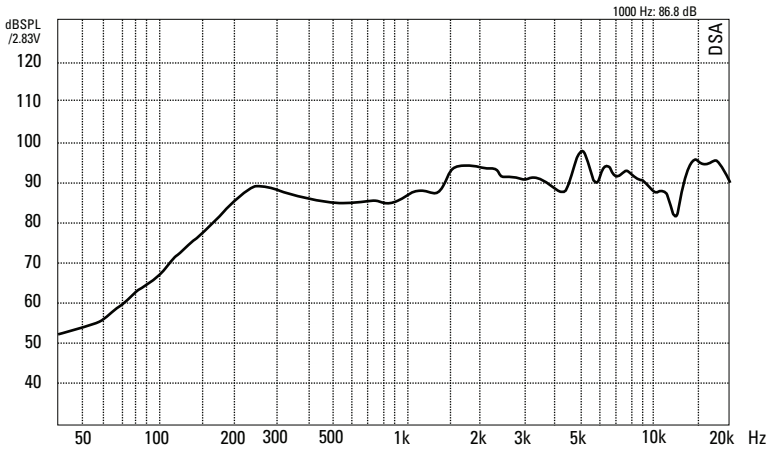

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice
Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT