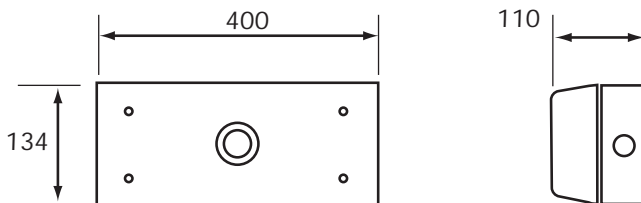

Protec Fire Detection plc

BULKHEAD LUMINAIRE



Dimensions (mm)



- Surface mountable.
- Cable entry on each end with BESA in rear.
- IP65 rating.
- Available in maintained, non-maintained, central battery and mains only versions.
- Compatible with Protec AL255 automatic addressable testing system.
- Manufactured to EN 60598:2.22 and registered to ICEL 1001.
- BSI kitemarked.

BULKHEAD SELF CONTAINED LUMINAIRES					
Stock Code	Sales Order Code	Mode	Emergency Lamp Output	Normal Lamp Output	Source (WATTS)
72-451-66	BH8/O/NM3/ICEL	NM	180 Lumen	N/A	8W
72-471-70	BH8/O/M3/ICEL	M	180 Lumen	400 Lumen	8W
72-455-70	BH8/O/S3	S	180 Lumen	400 Lumen	8W(E)8W MAINS

Mode NM = Non Maintained M = Maintained S = Sustained

BULKHEAD CENTRAL BATTERY LUMINAIRES					
Stock Code	Sales Order Code	Emergency Lamp Output	Central Battery Power Input		Source (WATTS)
			AC(VA)	DC (WATTS)	
72-601-62	OPAL DIFFUSER BH/O/8/24	320 Lumen	10.5	7.5	8W
72-621-66	BH/O/8/50	360 Lumen	11.5	8.5	8W
72-641-70	BH/O/8/110	360 Lumen	10	8.5	8W

Suffix /SUS for 8 watt sustained lamp 240V AC.

BULKHEAD MAINS ONLY LUMINAIRES					
Stock Code	Sales Order Code	Normal Lamp Output	Input Watts Without PFC	Input Watts With PFC	Source (WATTS)
72-671-76	OPAL DIFFUSER BH8/O/240	400 Lumen	38	15	8W
72-674-79	BH11/O/240	850 Lumen	46	21	11(PL)

Input Voltage 220/240v 50HZ. Suffix /PFC for power factor correction to 0.85.

The Bulkhead luminaire has an IP65 rating and is available with a 12" 8 watt fluorescent lamp for both self-contained, central battery and general lighting systems. Combined general and emergency luminaires are also available to special order, utilising energy saving PL lamps. The body of the bulkhead is moulded from self-coloured white Sternite 170 and is fitted with a hinged gear tray for quick and easy installation. The opal diffuser (clear prismatic to special order) is moulded from a high impact polycarbonate material.

Notes:

Prefix AD/ for addressable E.L. interface for use with AL255 automatic testing system

Prismatic Diffuser (to special order) replace "/O/" with "/P/".

Euro Legend Self adhesive European directive format exit legend, order ref: SELF/EURO.

Max Viewing Distance 18 metres based on the latest draft European directives



Head Office:
 Protec House,
 Churchill Way, Nelson,
 Lancashire BB9 6RT
Tel: (01282) 717171
Fax: (01282) 717273

South East Office:
 Crayfield House, Crayfield
 Industrial Park, Main Road,
 Orpington, Kent BR5 3HP
Tel: (01689) 894700
Fax: (01689) 894701

Leeds Office:
 Copley Hill Trading Estate,
 Whitehall Road, Leeds
 LS12 1HF
Tel: (0113) 220 4400
Fax: (0113) 220 4401

Midlands Office:
 Albrighton House, 135
 Allport Street, Cannock,
 Staffordshire WS11 1JZ
Tel: (01543) 468646
Fax: (01543) 468647

Scotland Office:
 The Glass Cube, Wyman
 Gordon Complex, Houstoun
 Road, Livingston EH54 5BZ
Tel: (01506) 498167
Fax: (01506) 498168

Company policy is one of continuous improvement, we reserve the right to change specifications without prior notice.

ADDRESSING SAFETY SYSTEMS WITH INTELLIGENCE

BULKHEAD LUMINAIRE

