



25 CEILING CLEARANCE MINIMUM

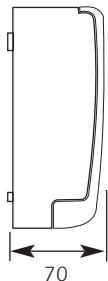

DIMENSIONS (MM)

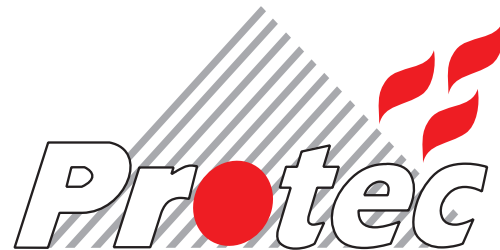

Protec Fire Detection plc

EXITPLUS LUMINAIRE

- Combined illuminated 'Exit' plus 'Emergency Lighting' luminaire.
- Direct illumination of Exit door and immediate escape route area.
- Fewer luminaires required, reducing installation costs.
- Cable entry via BESA in rear and 20mm top entry.
- Moulded clear polycarbonate diffuser with white body.
- High quality screen printed 'Euro' exit legend, mounted behind the diffuser for added protection.
- Available as a 'Self Test' luminaire. Compatible with the AL255 Addressable Emergency Lighting System.
- Manufactured to EN60598:2.22

EP/703



EP/715



EP/704



EP/716



EXIT LEGENDS

EXITPLUS SELF CONTAINED LUMINAIRES

Stock Code	Sales Order Code	Mode	Emergency Lamp Output	Normal Lamp Output	Weight Kg.
69-080-20	EP/NM3	NM	100 Lumen	N/A	1.8Kg
69-090-30	EP/M3	M	100 Lumen	400 Lumen	2.3Kg

Mode NM = Non Maintained M = Maintained
 Input Voltage 230v +/- 10% 50 Hz
 Input Current 25mA - Non Maintained, 175mA - Maintained
 Emergency Duration 3 Hours
 Environment 0°C to 25°C
 Lamp Type 8 Watt

EXITPLUS CENTRAL BATTERY LUMINAIRES

Stock Code	Sales Order Code	Emergency Lamp Output	Central Battery Power Input AC(VA)	DC (WATTS)	Weight Kg
69-100-40	EP/24	320 Lumen	10.5	10.5	1.7Kg
69-110-50	EP/50	360 Lumen	11.5	11.5	1.7Kg
69-120-60	EP/110	360 Lumen	10	10	1.7Kg

EXITPLUS MAINS ONLY LUMINAIRES

Stock Code	Sales Order Code	Normal Lamp Output	Input Watts Without PFC	Input Watts With PFC	Weight
69-130-70	EP/240	400 Lumen	38	15	1.9Kg

Input Voltage 220/240v 50HZ. Suffix /PFC for power factor correction to 0.85

EXITPLUS EURO LEGEND FASCIA PLATE

38-016-55	EP/703	Euro legend fascia plate 25m viewing distance
38-017-56	EP/704	Euro legend fascia plate 25m viewing distance
38-018-57	EP/715	Euro legend fascia plate 25m viewing distance
38-019-58	EP/716	Euro legend fascia plate 25m viewing distance

The Exitplus has been specifically designed to provide a clearly defined and unambiguous indication of the escape route from a building during mains failure, in accordance with BS5266 part 1, 1988.

The luminaire additionally provides excellent downlight to illuminate the exit door and escape route area around the luminaire.

The exit sign legend is screen printed onto a polycarbonate inner plate for improved quality and clarity. The legend panel is secured to the inside of the diffuser to avoid damage to the fascia. A range of legends are available for use with the Exitplus.



Head Office:
 Protec House,
 Churchill Way, Nelson,
 Lancashire BB9 6RT
Tel: (01282) 717171
Fax: (01282) 717273

South East Office:
 Crayfield House, Crayfield
 Industrial Park, Main Road,
 Orpington, Kent BR5 3HP
Tel: (01689) 894700
Fax: (01689) 894701

Leeds Office:
 Copley Hill Trading Estate,
 Whitehall Road, Leeds
 LS12 1HF
Tel: (0113) 220 4400
Fax: (0113) 220 4401

Midlands Office:
 Albrighton House, 135
 Allport Street, Cannock,
 Staffordshire WS11 1JZ
Tel: (01543) 468646
Fax: (01543) 468647

Scotland Office:
 The Glass Cube, Wyman
 Gordon Complex, Houston
 Road, Livingston EH54 5BZ
Tel: (01506) 498167
Fax: (01506) 498168

EXITPLUS LUMINAIRE

