




Protec Fire Detection plc

## MARSDEN LUMINAIRE

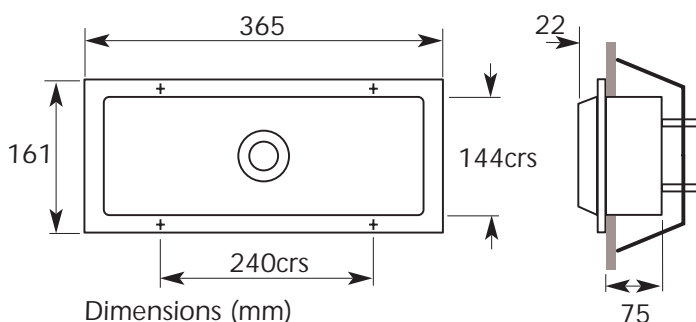

- Slim recess mounting with quick release hinged gear tray.
- BESA cable entry in rear.
- Available in maintained, non-maintained, central battery and mains only versions.
- Compatible with Protec AL255 automatic addressable testing system.
- 4 point spring action fixing.
- Manufactured to EN 60598:2.22

### MARSDEN SELF CONTAINED LUMINAIRES

Stock Code	Sales Order Code	Mode	Emergency Lamp Output	Normal Lamp Output	Source (WATTS)
69-010-01	MS8/NM3	NM	180 Lumen	N/A	8W
69-011-02	MS8/M3	M	180 Lumen	400 Lumen	8W

Mode NM = Non Maintained M = Maintained

### MARSDEN CENTRAL BATTERY LUMINAIRES

Stock Code	Sales Order Code	Emergency Lamp Output	Central Battery Power Input		Source (WATTS)
			AC(VA)	DC (WATTS)	
69-015-06	MS/8/24	320 Lumen	10.5	7.5	8W
69-016-07	MS/8/50	360 Lumen	11.5	8.5	8W
69-017-083	MS/8/110	360 Lumen	10	8.5	8W

Suffix /SUS for 8 watt sustained lamp 240V AC.

### MARSDEN MAINS ONLY LUMINAIRES

Stock Code	Sales Order Code	Normal Lamp Output	Input Watts Without PFC	Input Watts With PFC	Source (WATTS)
69-023-14	MS/8/240	400 Lumen	38	154	8W

Input Voltage 220/240v 50HZ. Suffix /PFC for power factor correction to 0.85.

The Marsden is a stylish, unobtrusive, recess mounted luminaire suitable for use in most ceiling constructions, especially suspended ceiling applications.

The body of the luminaire is constructed from sheet steel with a flush surround finished in a durable white epoxy powder coating. The slim, clear prismatic diffuser is vacuum formed from polycarbonate.

Fixed to the ceiling using 4 point spring action fixing, a slot and hinged gear tray arrangement enables quick and easy installation.

#### Notes:

**Prefix ST/** for Self Test Luminaire

**Prefix AD/** for addressable E.L. interface for use with AL255 automatic testing system

**Euro Legend** Self adhesive European directive format exit legend, order ref: SELF/EURO.

**Max Viewing Distance** 18 metres based on the latest draft European directives

**ICEL**
**BFP**  
 British Fire Protection System Association

 BS EN ISO 9002  
 Cert. No. FM 10567

 INTRUDER ALARMS  
 Cert. No. 100316

 ISO 9001 Certificate  
 No.s. 201, 188 & 268

#### Head Office:

 Protec House,  
 Churchill Way, Nelson,  
 Lancashire BB9 6RT  
 Tel: (01282) 717171  
 Fax: (01282) 717273

#### South East Office:

 Crayfield House, Crayfield  
 Industrial Park, Main Road,  
 Orpington, Kent BR5 3HP  
 Tel: (01689) 894700  
 Fax: (01689) 894701

#### Leeds Office:

 Copley Hill Trading Estate,  
 Whitehall Road, Leeds  
 LS12 1HF  
 Tel: (0113) 220 4400  
 Fax: (0113) 220 4401

#### Midlands Office:

 Albrighton House, 135  
 Allport Street, Cannock,  
 Staffordshire WS11 1JZ  
 Tel: (01543) 468646  
 Fax: (01543) 468647

#### Scotland Office:

 The Glass Cube, Wyman  
 Gordon Complex, Houstoun  
 Road, Livingston EH54 5BZ  
 Tel: (01506) 498167  
 Fax: (01506) 498168


MARS DEN LUMINAIRE