

- 150°C Thermal Fuse
- Ceramic Terminal Block
- ABS Housing with UVL Inhibitor
- Fully Compliant with EN54-24
- Cert No: 0359-CPD-0164 Type B




This weatherproof sound projector offers a combination of style and performance that is hard to match.

Manufactured from an ABS moulded component with built-in UVL (ultra violet light) protection, complete with a high quality, plastiflex treated cone. This speaker comes with an aluminium U bracket for ease of installation.


This unit is supplied in a stylish and compact enclosure, ideally suited for speech and music reproduction. With the added advantage of being fully weatherproofed, it is ideal for use on railways, car parks, shopping centres, sports grounds etc.

Dimensions (mm)

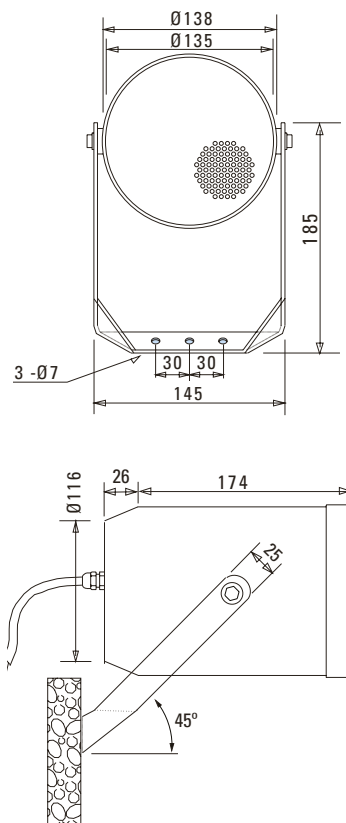

Technical Specification

Circuit Diagram

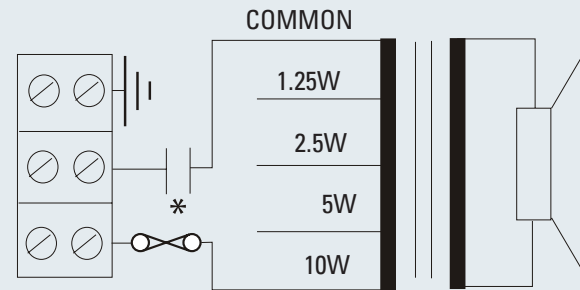


*with capacitor

Technical Specification:

Power Handling	10 watts
Rated Input	100 volt
Transformer Tappings	10, 5, 2.5, 1.25 watts
SPL (1w/1m)	90dB*
Max SPL (rated/1m)	100dB*
Frequency Range	110Hz – 18kHz
Dispersion 1kHz/2kHz	180° / 120°
Dimensions (diameter x depth)	138mm x 204mm
Material	Steel Mesh, ABS Plastic
Weight (inc. packaging)	1.3 kg
Colour	White RAL9016
Stock Code	200-063-19-CEN

*Test Signal Bandwidth 100Hz - 10kHz

Frequency Range

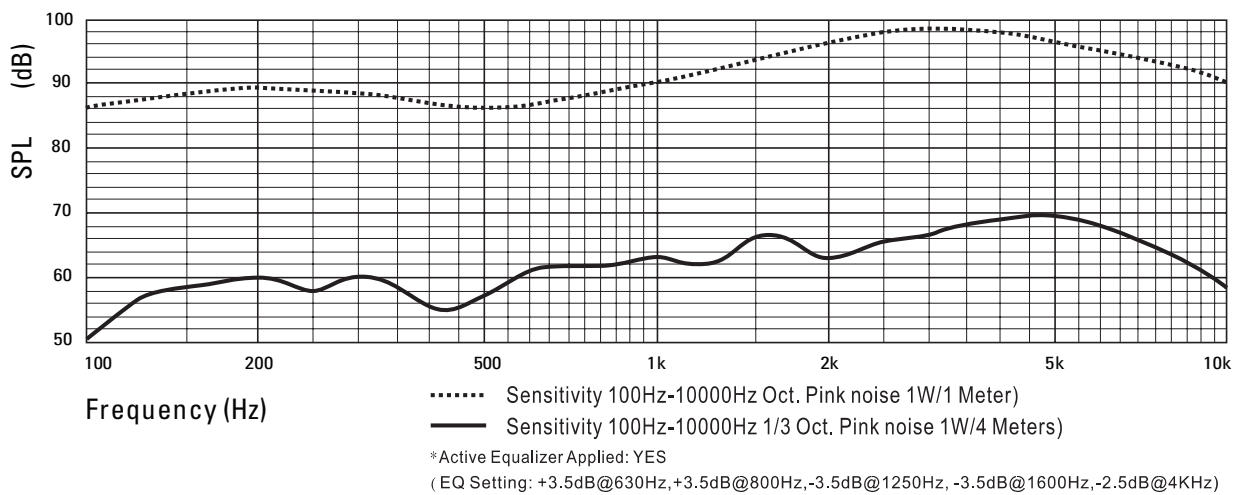

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT

© 2013 - 2016 Protec Fire Detection plc