

- LED Technology for Long Service Life
- Cost Effective Installation Solution
- Ideal for Bedrooms, Bathrooms and Toilets
- 2.4 metres (m) Mounting Height
- 7.5 metres (m) Room Coverage Volume
- Adjustable Flash Rate
- Approved to EN54 Part 23



The Protec 3000/VAD/W is a conventional wall mounted high intensity Visual Alarm Device (VAD).

The device is categorised for installation at a height of up to 2.4m and room coverage of 7.5m x 7.5m (W-2.4-7.5).

The product has a unique lens that distributes the light in a cuboid shape to achieve the required illumination of 0.4lux over the entire coverage area in accordance with EN54-23.

The design is based on LED technology for long life, reliability and low power consumption.

The 3000/VAD/W has a Type B (IP33C) + IP65 rating making the product suitable for mounting internally or externally.

Compliance with DDA legislation, this high intensity led beacon warns those with hearing impairments or in noisy environments.

This device is available in a white or red housing with a white flash rate of 1 or 0.5Hz.

Order Codes

3000/VAD/W/RED


3000/VAD/W/WHITE

Technical Specification




15LHK0959-01

Dimensions (mm)

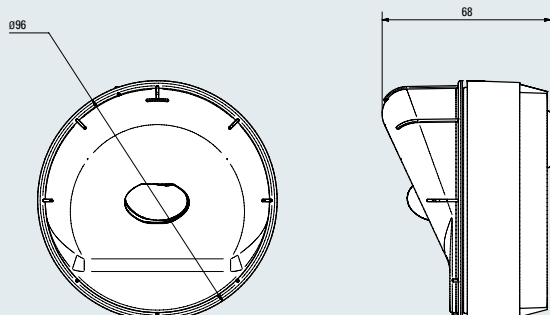

Wiring Diagram



Technical Specification

Environment	-10 to 50°C, 95% R.H (non condensation or icing)
Ingress Protection	Type B (IP33C) + IP65
Weight	123g
Voltage	18 - 28V
Mounting Height (x)	2.4 metres
Coverage(y)	7.5 metres
Coverage Volume Code	W-2.4-7.5
Flash Rate	1 to 0.5Hz white flash
Mounting	Wall
Relevant Standard	EN54 Part 23

Design Guidance

Protec VAD's have been approved to BS EN 54-23 and use the rating codes below:

W-x-y (eg W-2.4-7.5)

Where:

W is wall mounted

x is the maximum height (M)

y is the horizontal distance of the square volume covered (Length x Width) (M)

BS EN 54-23 approved VAD's are approved as wall mounted and must provide a minimum illumination level of 0.4 lux for the stated volume.

Table A: Direct Viewing

Coverage volumes for various ambient light levels (lux)

BS EN54-23 Rating	W-2.4-7.5
Mounting Position	Wall
Less than 100 lux	39m x 39m
100 - 200 lux	33m x 33m
200 - 300 lux	24m x 24m
300 - 400 lux	17.25m x 17.25m
400 - 500 lux	13.5m x 13.5m
500 - 600 lux	9.75m x 9.75m
600 - 700 lux	7.5m x 7.5m
700 - 800 lux	5.25m x 5.25m


Table B: Indirect Viewing

Coverage volumes for various ambient light levels (lux)

BS EN54-23 Rating	W-2.4-7.5
Mounting Position	Wall
Less than 100 lux	13.5m x 13.5m
100 - 200 lux	12.75m x 12.75m
200 - 300 lux	10.5m x 10.5m
300 - 400 lux	9m x 9m
400 - 500 lux	7.5m x 7.5m
500 - 600 lux	6.75m x 6.75m
600 - 700 lux	*
700 - 800 lux	*

Coverage volumes height, length and width dimensions are in metres.

* Where ambient light levels may, at any time, exceed 600 lux, direct viewing is preferred (CoP 001 clause 4.6.9.4)

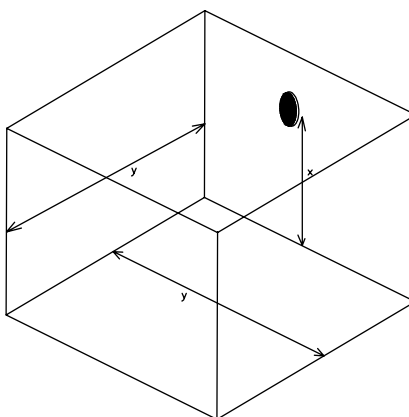

Model References

Product Code	Colour Options
3000/VAD/W/RED	Red Body (White Flash)
3000/VAD/W/WHITE	White Body (White Flash)
NOTE: All Model References above are 24V DC VAD's, supplied with a low profile base. An optional deep base (below) can be purchased separately to allow surface wiring to be terminated directly into the base.	
29-982-75	Red Deep Base
29-983-76	White Deep Base

Deeper Base Dimensions (mm)

