

6 Watt Bi-Directional Cabinet


- Aesthetically Pleasing ABS Bi-Directional Loudspeaker
- Ideal for Speech & Music
- Ideal for Corridors
- Steel Mesh, ABS Body



The Bi-Directional cabinet loudspeakers are constructed from ABS plastic and can be installed on solid ceilings or walls. The standard finish of the cabinet is RAL9010.


This Bi-Directional unit contains a single cone loudspeaker offering a wide frequency range suitable for both speech and music applications.

Dimensions (mm)

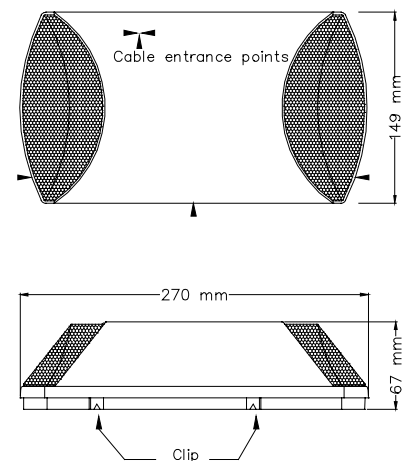

Technical Specification

Circuit Diagram

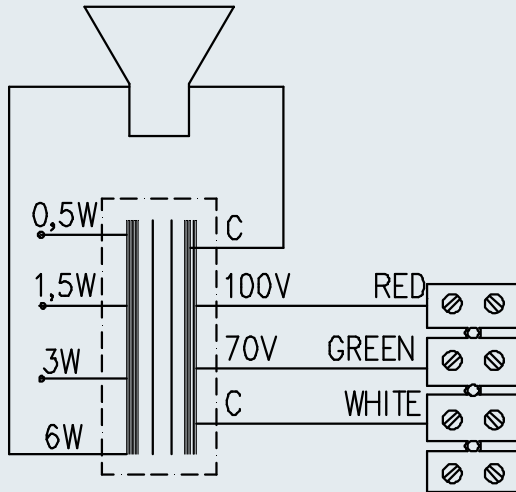

Technical Specification:

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.5 watts
SPL (1w/1m)	86dB
Max SPL (rated/1m)	94dB
Frequency Response	170Hz – 20000Hz
Dispersion at 1k/4kHz	180° / 120°
Dimensions (width x height x depth)	270 x 149 x 67mm
Material	ABS Plastic
Weight (inc. packaging)	0.77kg
Colour	White RAL9010
Stock Code	200-280-21

Frequency Response

SPL vs Freq



Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT

© 2013 - 2016 Protec Fire Detection plc