

## 6 Watt Ceiling Loudspeaker

- Twin Cone Speaker
- Excellent Frequency Response
- Suitable for Paging & Background Music
- Powder Coated Grille (White)
- Ceiling Cutout Template




6.5", twin cone, flush mount ceiling speaker with innovative fitting system for fast and simple installation.

This loudspeaker has been carefully designed to satisfy the most critical eye. This unit is stylish yet unobtrusive and is supplied with a flush fixing bracket.


Made from a pressed steel epoxy coated chassis incorporating a twin cone driver, which has a wider frequency range than the standard single cone, this makes this loudspeaker more suitable for use in applications where background music is a primary requirement.

### Dimensions (mm)

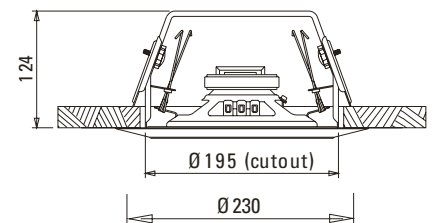

# Technical Specification


## Circuit Diagram

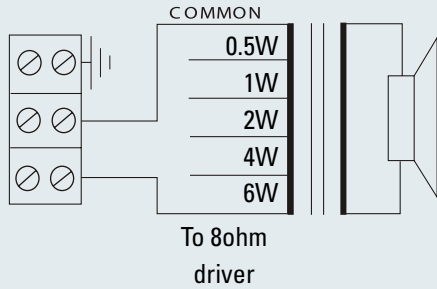

## Technical Specification:

|                               |                       |
|-------------------------------|-----------------------|
| Power Handling                | 6 watts               |
| Rated Input                   | 100 volt              |
| Transformer Tappings          | 6, 4, 2, 1, 0.5 watts |
| SPL (1w/1m)                   | 92dB                  |
| Max SPL (rated/1m)            | 99dB                  |
| Frequency Response            | 90Hz – 20kHz          |
| Dispersion 1kHz/4kHz          | 120° / 90°            |
| Dimensions (diameter x depth) | 230mm x 124mm         |
| Cutout Size (diameter)        | 195mm                 |
| Material                      | Steel                 |
| Weight (inc. packaging)       | 1.1 kg                |
| Colour                        | White RAL9010         |
| Stock Code                    | 200-007-00            |

## Frequency Response

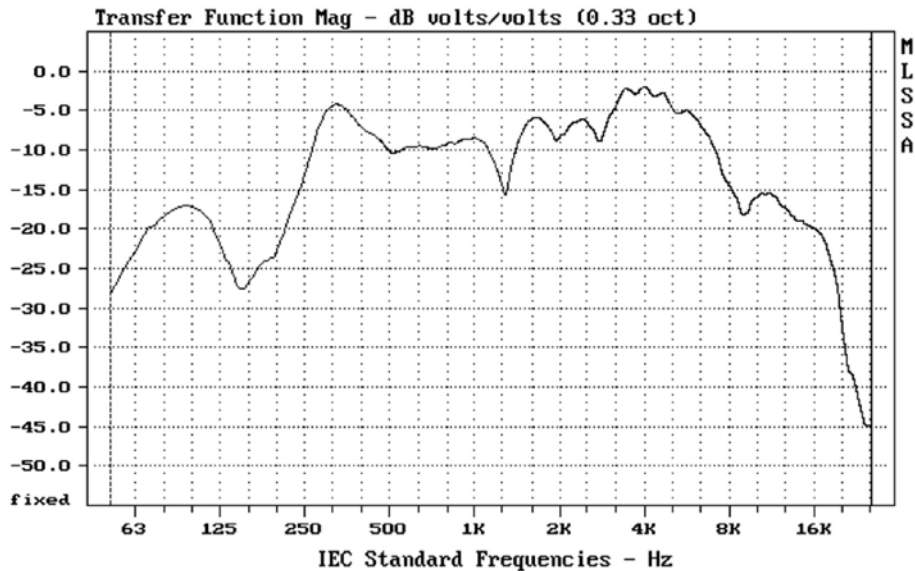

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT

© 2014 - 2016 Protec Fire Detection plc