

- Dual Coned Loudspeaker
- 150° Thermal Fuse
- Ceramic Terminal Block
- Complies with EN54-24
- Cert No: 0359-CPD-0167 Type A




This cabinet loudspeaker is a real innovation in design and performance. These exceptional loudspeakers are both stylish and elegant and offer a cost effective alternative to the conventional wooden cabinet loudspeaker.

This is a 6 watt dual coned loudspeaker complete with line transformer, ideally suited for high quality speech and background music.


Installation is quick and easy using concealed fixings, making these cabinets ideally suited for applications that require style as well as high performance such as shops, restaurants, hotels, public houses, offices etc.

This white moulded cabinet loudspeaker with an epoxy coated steel grille offers an alternative to the conventional wooden types available. The ABS plastic has added polymer to avoid discolouration in bright sun light (UV proofed).

Dimensions (mm)

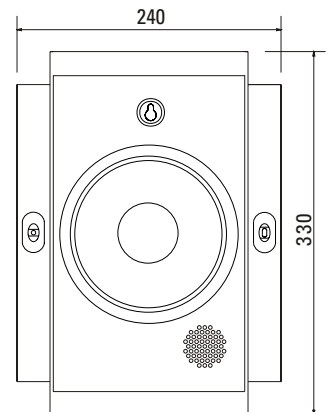


Top View



Technical Specification

Circuit Diagram

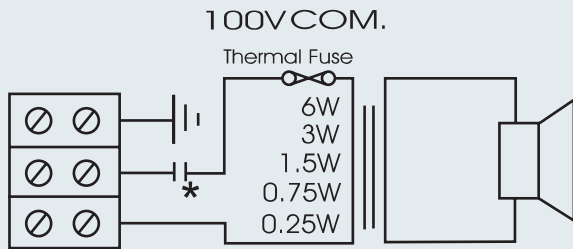


*with capacitor

Technical Specification:

Power Handling	6 watts
Rated Input	100 volt
Transformer Tappings	6, 3, 1.5, 0.75, 0.25 watts
SPL (1w/1m)	96dB*
Max SPL (rated/1m)	104dB*
Frequency Response	160Hz – 18kHz
Dispersion at 1k/2kHz	119° / 100°
Dimensions (mm)	330(W) x 240(H) x 90(D)
Material	Steel Mesh, ABS Body
Weight (inc. packaging)	1.15 kg
Colour	White RAL9016
Stock Code	SP2315-CEN

*Test Signal Bandwidth 100Hz - 10kHz

Frequency Range

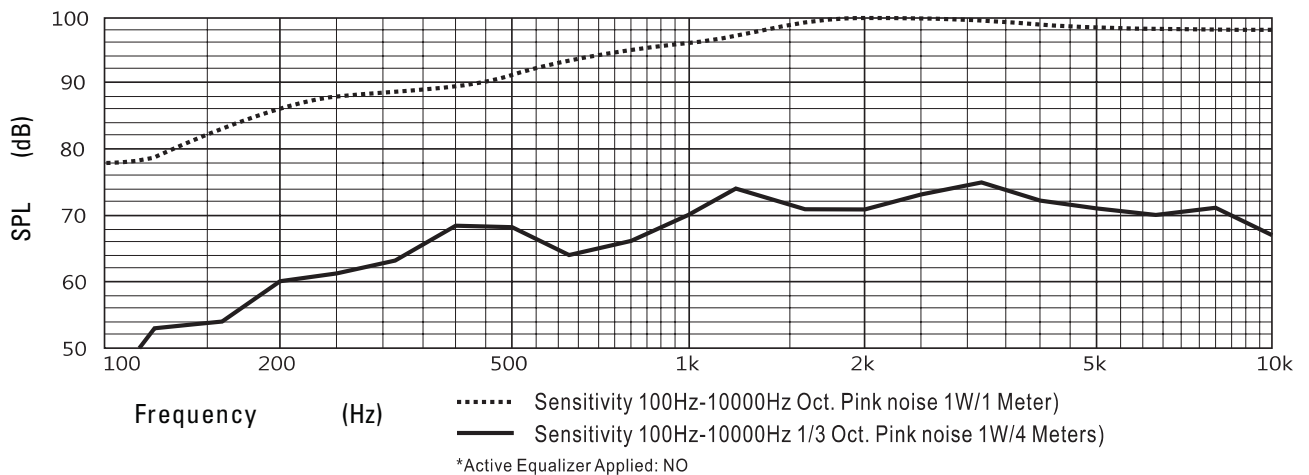

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT

© 2013 - 2016 Protec Fire Detection plc