

- **Direct Illumination of Exit Door and Immediate Escape Route Area**
- **Best in Class Performance, Uniformity Lit Legend, Compliant with EN1838**
- **Available in Maintained, Non Maintained, Self Contained and Self Test Emergency Luminaires**
- **Compatible with Protec DigiLite® DL500 MKII Automatic Addressable Testing System**
- **Reduces Maintenance Cost (60,000 hour life LED's)**
- **Manufactured to the Latest EN60598-2.22**



The Protec Exitplus has been specifically designed to provide a clearly defined and unambiguous indication of the escape route from building during a mains failure in accordance with BS5266 Part 1-1:2011.

The luminaire additionally provides excellent downlight to illuminate the exit door and escape route area around the luminaire.

The Exitplus combines the long life and low maintenance benefits of LED technology with energy efficient operation.

The Exit sign legend is screen printed onto a polycarbonate inner plate for improved quality and clarity. The legend is secured to the inside of the diffuser to avoid damage to the fascia. A range of legends are available for use with the Exitplus. Installation is simple into either solid or suspended ceilings due to innovative fixing arms that allow the fitting to pass easily into amounting aperture on solid ceilings.

### Order Codes

#### Self Contained

- **EP/LED/NM3**  
Exitplus LED Non-Maintained 3hrs
- **EP/LED/M3**  
Exitplus LED Maintained 3hrs

#### Self Test Self Contained


- **ST/EP/LED/NM3**  
Exitplus Self Test LED Non-Maintained 3hrs
- **ST/EP/LED/M3**  
Exitplus Self Test LED Maintained 3hrs

#### DigiLite Self Contained


- **DL/EP/LED/NM3**  
Addressable Exitplus LED Non-Maintained 3hrs
- **DL/EP/LED/M3**  
Addressable Exitplus LED Maintained 3hrs

# Technical Specification

## Dimensions (mm)

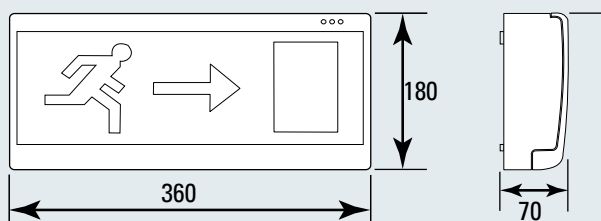

## Maximum Viewing Distance

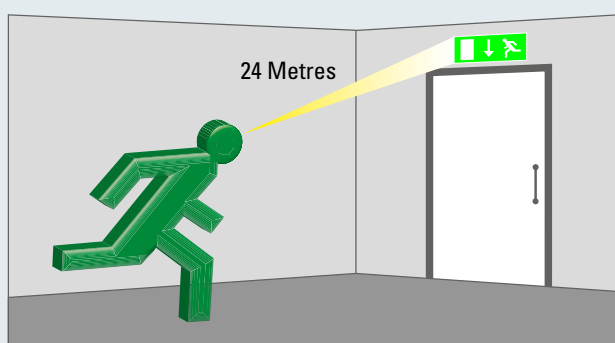

## Technical Specification:

Environment	0°C to 55°C (non condensing), 0 to 93% R.H. (non condensing)
Ingress Protection	IP30
Weight	1.44kg
Supply Voltage	230 Volts AC -15%, +10%, 50/60 Hz
Input Power Rating	2.90 W
Lumen Output	68 Lumens
Light Source	LED , Cool White CCT(K):6922 CRI(%):82.83
Emergency Duration	3 hours
Battery Types	3.6 V Nickel Metal Hydride
Recharge Time	24 Hours
Relevant Standard	EN1838, EN60598-2-22 & ISO 7010

## Exit Legends

Order Code	Legend	Description
EP/715		Progress forward from here (indicating direction of travel) / Progress forward and up from here (indicating change of level)
EP/716		Progress forward from here (indicating direction of travel) / Progress down from here (indicating change of level)
EP/703		Progress to the left from here (indicating direction of travel)
EP/704		Progress to the right from here (indicating direction of travel)
EP/ISO/UP		Progress forward from here (indicating direction of travel) / Progress forward and through from here, when sign is sited above a door (indicating direction of travel) / Progress forward and up from here (indicating change of level)
EP/ISO/DOWN		Progress down from here (indicating change of level)
EP/ISO/LEFT		Progress to the left from here (indicating direction of travel)
EP/ISO/RIGHT		Progress to the right from here (indicating direction of travel)