




# Technical Specification



## Dimensions (mm)

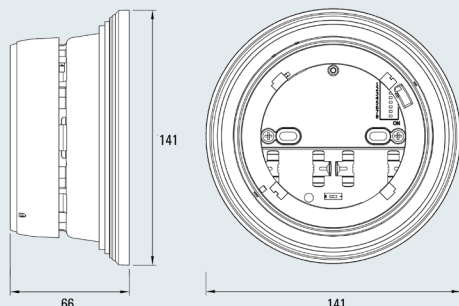

## Technical Specification

Operating frequency range	868 - 870 MHz
Operating frequency channels	7
Communication range with the Translator or Expander Module	≤ 150m (in open space)
IP rating	21C (Type A for indoor use only)
Sound Output (typical)	70-95dBA (tone dependant)
Number of Tones	32
Visual Indicator frequency	1Hz
Dimensions (mm)	141Ø x 66(H)
Weight (without batteries)	260g
Primary battery	CR123A (3 V & 1.2 Ah)
Secondary battery	CR123A (3 V & 1.2 Ah)
Primary battery lifespan (typical)	≥ 3 years
Backup at low battery (typical)	≥ 2 months
Operating Temperature	-10°C to +55°C
Max humidity	95% RH (non condensing)
RoHS Standard	EN54 Part 3 & 25

DRAFT