

# 19" Enclosure Options



**Australian Options / Stockcode**

13U and 3A charger, 2 loops / 6020-361  
16U and 8A charger, 2 loops / 6020-851

**New Zealand Options / Stockcode**

13U and 3A charger, 2 loops / 6020-361-0046  
16U and 8A charger, 2 loops / 6020-851-0046

- Robust metal construction with powder coated finish
- Various door options available
- Various optional hinged ancillary plates
- 13U and 16U sizes available
- IP30 Environmental rating
- Fits standard 19" peripherals
- Ideally suited to Deluge, Sprinkler, Damper, Fireman's control panels, Fan controls, MEI Interface and BOWS


The Protec 19" rack mount enclosure system has been primarily designed to be compatible with the Protec range of Fire Control and Indicating Equipment.

The enclosures meet the dimensional requirements for 19" rack systems and can therefore accommodate non Protec 19" equipment, however, due consideration must be given to the relevant dimensions of the enclosure to ensure equipment fits correctly.

The system is available as two enclosure options (13U and 16U), and two basic door options; Australian (incorporating a Manual Call Point) and New Zealand (incorporating Silence and Evac Keyswitches).


Also required to create the final build are a range of user selectable hinged function plates and blanking plates designed to give an extensive range of options.

## Containment size

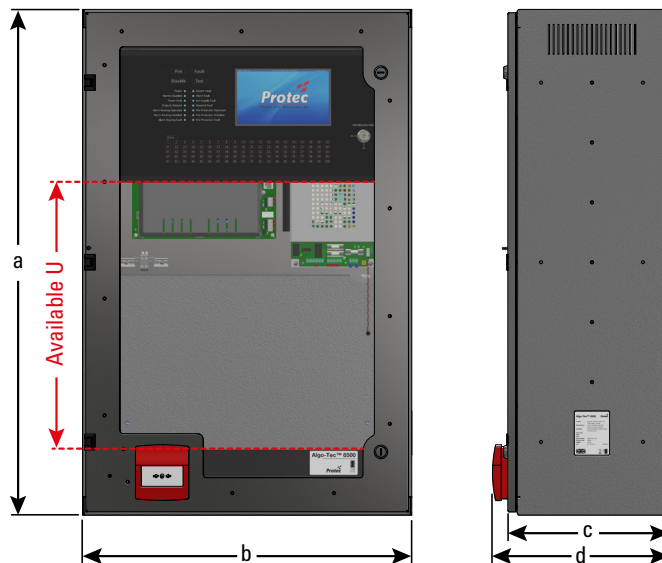

NOTE:  
The "available U" is the space available for plates. See overleaf for plate options.

Enclosure (No of U)	Available (U)	Dimensions (mm)			
		Height (a)	Width (b)	Depth (c)	Depth (d)
13U	8U	711	550	270	295
16U	11U	845	550	270	295

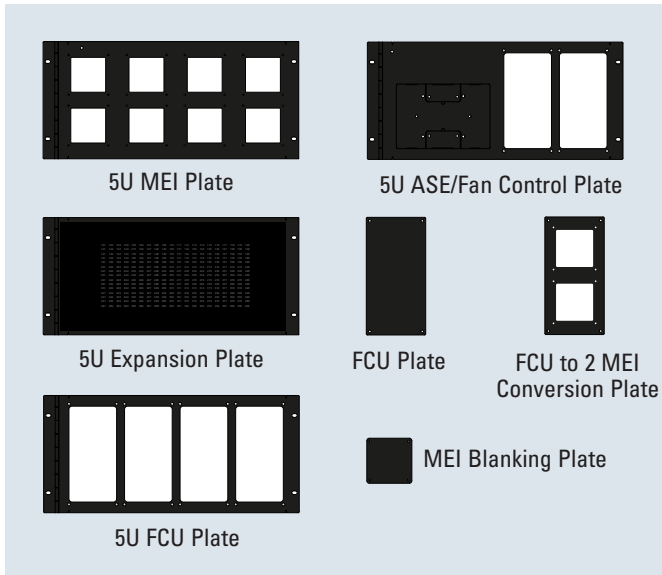

## Hinged Function Plate Options


Enclosure	Dimensions (mm)		Stockcode
	Width	Height	
5U MEI Plate	483	221.5	N 45-022-100
5U 300 LED Zone Expansion Plate	483	221.5	N 45-022-111
5U FCU Plate	483	221.5	N 45-022-97
5U ASE/Fan Control Plate	483	221.5	N 45-022-57
FCU Blanking Plate	102	202	N 45-022-95
FCU to 2 MEI Conversion Plate	104	204	N 45-037-18
MEI Blanking Plate	88	88	N 45-022-102

Both the FCU and FCU to 2 MEI plates are optional with the 5U FCU and 5U ASE/Fan Control plates.




## Blanking Plate Options

Enclosure	Dimensions (mm)		Stockcode
	Width	Height	
1U Plate	483	44	N 47-150-61
2U Plate	483	88.5	N 47-075-67
3U Plate	483	132.5	N 47-076-68
5U Plate	483	221.5	N 47-077-69

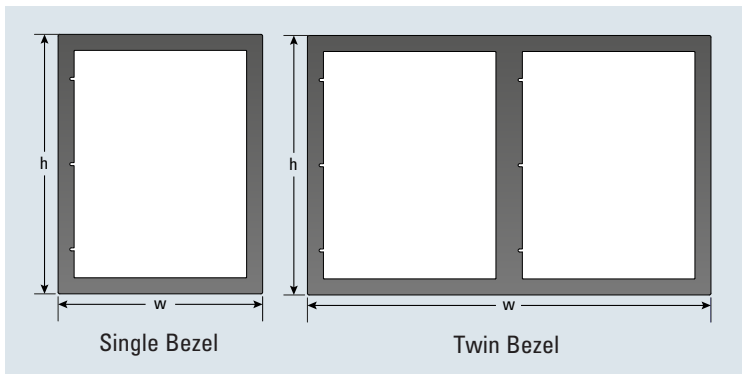

## Optional Items Bezels

Bezel	Dimensions (mm)		Stockcode
	Width	Height	
13U Single	600	761	N 45-037-00
16U Single	600	894.7	N 45-022-47
13U Twin	1183.5	761	N 45-022-110
16U Twin	1183.5	894.7	N 45-022-48

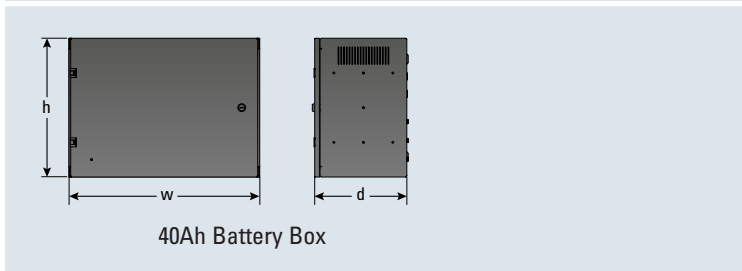

## Battery Box

Enclosure	Dimensions (mm)			Stockcode
	Width	Height	Depth	
3 Amp	550	400	269.5	N6000-3B0
8 Amp	550	400	269.5	N6000-8B0



Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Bosch Security Systems Pty Ltd, Suite 1, Level 2, 21 Solent Circuit, Baulkham Hills, NSW 2153, Australia © 2024 Bosch Security Systems Pty Ltd

Tel: +61 02 9842 4700 Web: www.protec.co.uk Email: protecanz.info@au.bosch.com