

EVX-ACM - Touch Screen Assist Call Only Master Station

- Accepts Assist Calls on a Shared Network
- 4.3" Full Colour Touch-screen
- Fully Compliant to BS5839-9
- Integrated Assist Call with acknowledge meeting BS8300
- 1.5A EN54-4:A2 PSU
- Wall mount enclosure
- Expandable from 2 to 512 lines
- Inbuilt networking



The EVX-ACM Master station can accept and display Emergency Assist Alarm calls on combined networks. The unit can additionally accept up to eight lines of outstation, (Type A fixed phones, Type B refuge hands free points, emergency assist alarm point or jack points in Far East and Middle East applications) as required.

The touch-screen layout has four buttons allowing quick access to the main functions, and permanently displaying the number of current calls, alarms and faults. Emergency Assist Alarm calls can be acknowledged by pressing the Icon on screen (as required by BS8300) and will return to alarm if not reset within two minutes.

The EVC-ACM has inbuilt networking allowing it to form one of the 64 panels on a EVX network installation allowing a total of 512 outstations to be accommodated. Each panel can be a master station or EVX-EX8 network expander.

Technical Specification

Power Supply and Charger

AC input	230VAC +/- 10% 50/60Hz
Internal supply	5V, 16V, 27V DC
Supply	Monitored Open, Short, Fuses, High Impedance
Protection	Deep discharge, Short, Thermal
Battery type	1 x 12V 7AH VRSLA
Mains fuse	240V 1A HRC
Battery fuse	750mA PTC
Charge current	400mA

Inputs

Lines	2-8 in 2 line blocks
Remote enable	Short to use
End of line	10KΩ

Outputs

Number	2, Fault & In use
Type	Volt free relay
Contact	30V DC 1A

*Refer to BS5839-9:2011 for exceptions

Controls

Buttons	3 Navigation keys
Touch-screen	4.3" 272 x 480 x RGB
State LED	1, RGB indicator
Fault LEDs	3, PSU, System, General
Supply LEDs	2, AC ,DC present

Network Cables

Type	Enhanced*
Cores	2x2 core 1mm or 1.5mm
Distance	500m

Standards Compliance

EMC	EN55103-1, EN55103-2
LVD	EN60065
Product Family	BS5839-pt9, BS9999, BS8300

Dimensions

	Panel	Bezel	Cut-out
Height	300mm	350mm	305mm
Width	220mm	270mm	225mm
Depth	95mm	1mm	85mm
Weight	6.5Kg		

The EVX-ACM is a self contained enclosure housing a 4.3" touch screen, one to four dual line cards, an EN54-4:A2 2006 power supply & battery charger and can be surface or flush mounted (Using the EVX-SBZ Bezel).

The case is made from powder coated zintec, 20mm cable knock-outs are provided for all necessary cables as well as space for the single 12V VRSLA backup battery required.


The master station is configured using a spreadsheet (excel and open office) and installed using the MMC card, this also holds the site logs.

The whole site can be configured from any master station.

Each outstation has three labels, one for Emergency Assist, one for EVCS and one for Fault text, each label is two lines of twenty characters.

Each Master station can be programmed to answer specific outstations, and these can differ from day to night.

Typical Schematic

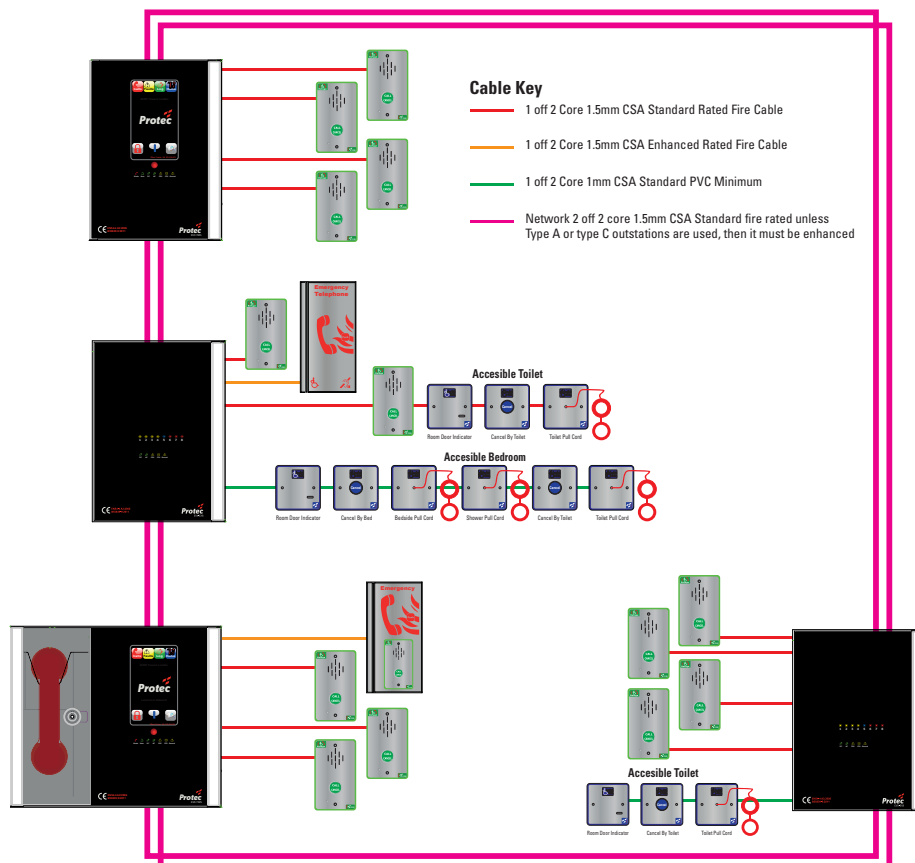

Company Policy is one of continuous improvement, we reserve the right to change specification without prior notice

Protec Fire Detection Plc, Protec House, Churchill Way, Nelson, Lancashire, BB9 6RT

© 2017 Protec Fire Detection PLC

Tel: 01282 717171 Fax: 01282 717273 Web: www.protec.co.uk Email: sales@protec.co.uk